



MLC635-Smart Refrigerator Low TempLoad Cell10kg

Shenzhen CityMANYEAR TECHNOLOGY-Smart Refrigerator Low TempLoad Cell-MLC635

1kg-25kg 全 CapacityCoverage, 10kg Model Specifically ForSmart Refrigerator Low TempWeighing 设计, 适配 Kitchen Scale、Pet Feeder、Coffee Machine 等多场景。55*12.7*12.7mm MiniatureDimensions, Aluminum AlloyMaterial, 轻量 Shproof, 120% Overload Protection + 150% UltimateOverload, Low Temperature 环境数据无漂移, 稳定耐用。以小体积大能量, 助力 SmartEquipment 升级, 精准 Weighing 轻松实现!

Model: MLC635

Product Catalog: MiniatureLoad Cell

Rated Load: 1kg、2kg、3kg、4kg、5kg、10kg、20kg、25kg


Dimensions: 55*12.7*12.7mm

Overload Protection: 120%

UltimateOverload: 150%

Material: Aluminum Alloy


Suitable for: Kitchen Scale、Pet Scale、Pet Feeder、Smart Cup、Smart Rice Cooker、Coffee Machine、Vending Machine、Bench Scale

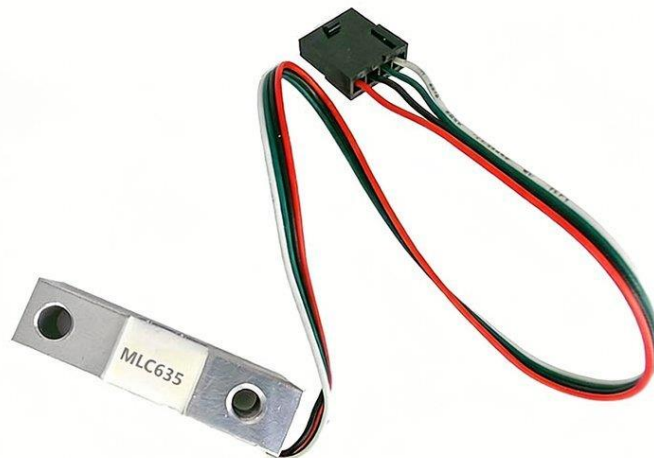

Technical Parameters

Comprehensive Error:	0.05FS	Output Resistance:	1000±10Ω
Rated Output:	1.0±0.15mV/V	Insulation Resistance:	≥2000MΩ (100VDC)
Non-linearity:	0.05%FS	Excitation Voltage:	5~10VDC
Hysteresis:	0.05%FS	Compensated Temp Range:	10~+40°C
Repeatability:	0.05%FS	Operating Temperature:	20~+55°C
Creep:	0.05%FS/10Min	温°Zero Effect:	0.05%FS/10°C
Zero Balance:	±0.1mV/V	温°SensitivityEffect:	0.05%FS/10°C
Input Resistance:	1000±10Ω	Protection Class:	IP66

Force Structure

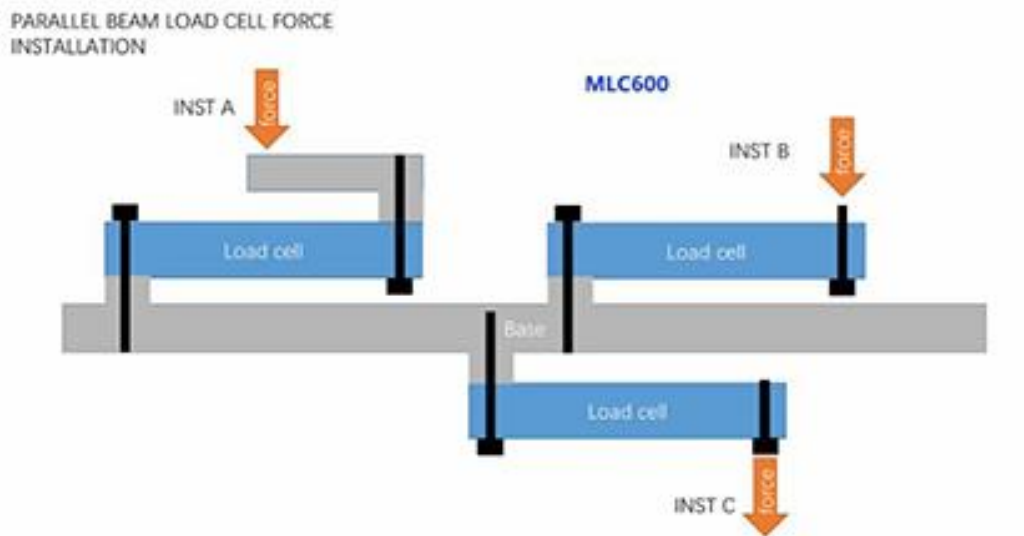

Product Dimensions

